

## PAX S300 WITH CORNERSTORE GUIDE


Note: The PAX must first be set up on your network. An ethernet cable will be required to hardwire the PAX to your network router. You will use the **RED** dongle on attached to the PAX device to connect the ethernet cable.

### Obtaining the IP Address for input into Cornerstore POS

	<ol style="list-style-type: none"><li>1. Press the blue FUNC button and the 1 key at the same time.</li></ol>
--	---



2. Enter the default password "916860" then press the green key on the key pad. If the default password does not work, you will need to contact your payment processor for assistance.

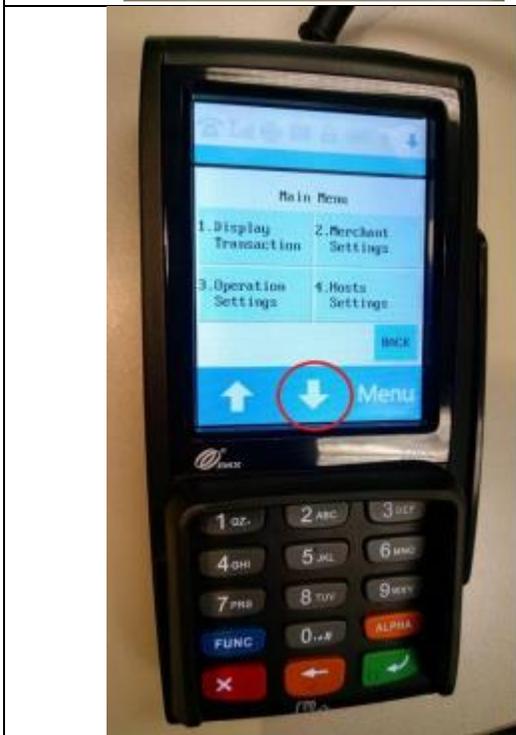

3. Tap on the down arrow to access additional selections.



4. Tap on Communication or press 2 on the keypad.



5. Enter the default password "916860" then press the green key on the keypad. If the default password does not work, you will need to contact your payment processor for assistance.



6. Tap on the down arrow to access additional selections.



7. Tap on LAN Parameters or press 3 on the keypad.



8. Tap on IP Address or press 2 on the keypad.




9. Make a note of the IP Address that is displayed in the box. We will need to enter this information into CRE later on. Tap twice on the blue arrow on the screen or press the red button with the X twice to go back to the previous menu.



10. Tap on LAN Type or press 1 on the keypad.



11. Tap on Static or press 2 on the keypad.

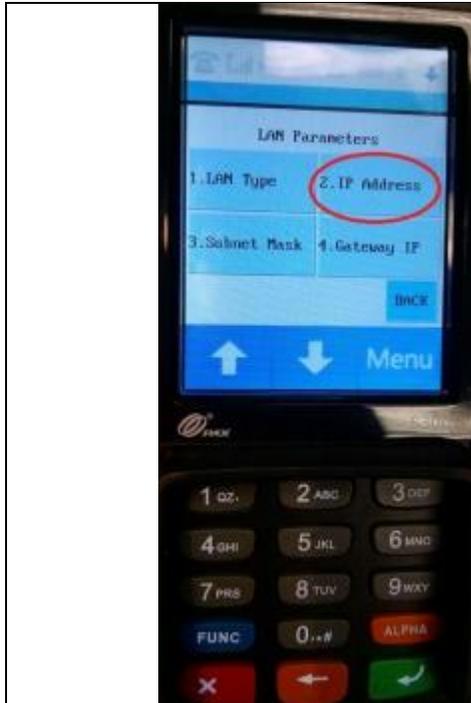


12. Tap on IP Address or press 2 on the keypad.



13. Confirm the IP Address displayed is the same as what you noted in step 9. Alternatively, you may assign a different IP address by tapping on the blue arrow once or pressing the red key with the X, then using the number pad to enter a new IP address; hit the green key to save your changes. You will need to enter the IP Address as 12 digits, e.g. if the IP Address you are entering is 172.25.1.30, this will have to be keyed in as 172.025.001.030. Take note of the new IP address then press the green key with the arrow to save your changes. Press the red button with the X repeatedly until you are back at the INSERT/SWIPE ANYTIME screen. Note: If you do not know how to obtain an IP address, you may need to contact your network administrator.

## Input IP Address into Cornerstore POS

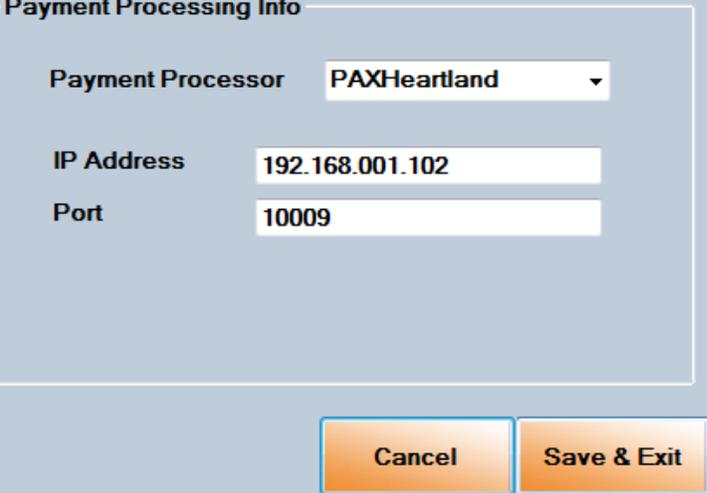 <p>The screenshot shows the main point of sale screen. At the top, there are buttons for amounts: 5, 10, 15, and 20. Below these are 'EASY PAYOUT', left and right arrow buttons, and a 'SETUP' button which is circled in red. At the bottom is a large 'Pay' button.</p>	<p>1. Open Cornerstore to the main point of sale screen and navigate to the setup menu.</p>
 <p>The screenshot shows the administrative menu with several options: Tax Rates, Department Maintenance, Inventory Maintenance, General, Payment Processing (circled in red), Reporting, OnTheFly Inventory, Administrator (circled in red), Purchase Orders, and Exit.</p>	<p>2. Navigate to the administrative menu and then proceed to payment processing.</p>
 <p>The screenshot shows the 'Payment Processing Info' dialog box. It has a 'Payment Processor' dropdown menu set to 'PAXHeartland'. Below it are input fields for 'IP Address' containing '192.168.001.102' and 'Port' containing '10009'. At the bottom are 'Cancel' and 'Save &amp; Exit' buttons.</p>	<p>3. Use the drop down and select <b>PAX HEARTLAND</b>. Then, enter the <b>IP Address</b> found on the PAX from the previous section. Enter “<b>10009</b>” for the port number and click save and exit.</p> <p>Ring up a test credit sale. You should now see your sale rung up on the PAX.</p>

